



HP-21


HP-21

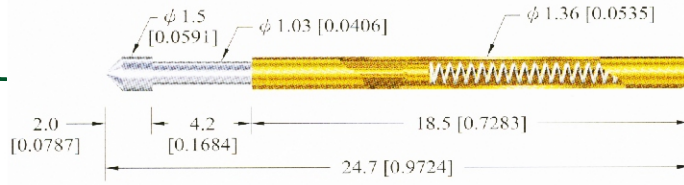


ACTUAL SIZE



HP-23

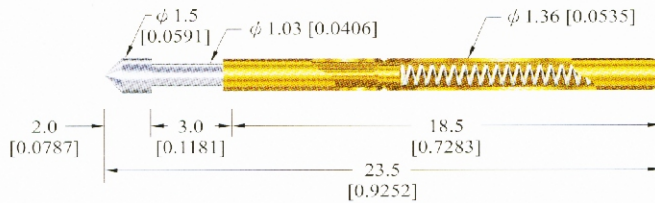


ACTUAL SIZE




Plunger	Heat-Treated Beryllium Copper with Rhodium Plated Over Nickel
Barrel	Phosphor Bronze with Gold Plated
Spring	Stainless Steel
Receptacle	Phosphor Bronze with Gold Plated


HP-2A1




HP-21B




HP-21D




HP-21D2




HP-21E1




HP-21E2




HP-21E2[S]




HP-21E4




HP-21E5




HP-21E6




HP-21F




HP-21F1




HP-21H




HP-21K2




HP-21K4




HP-21K5



HP-21K6



HP-21T1



Min .Center	2.54mm [0.10]	
Full Stroke	21#	23#
	4.2mm [0.1654]	3.0mm [0.1181]
Full Stroke Spring Force (±20%)	150g [5.29oz]	
2/3 Stroke Spring Force (±20%)	115g [4.06oz]	
Current Rating	3A	
Contact Resistance	30mΩ	
Recommended Hole Size	Acrylic	1.70mm [0.0669]
	Bakelite	1.75mm [0.0689]
	Fiber Reinforce Plastic	1.75mm [0.0689]