


HP-02




ACTUAL SIZE

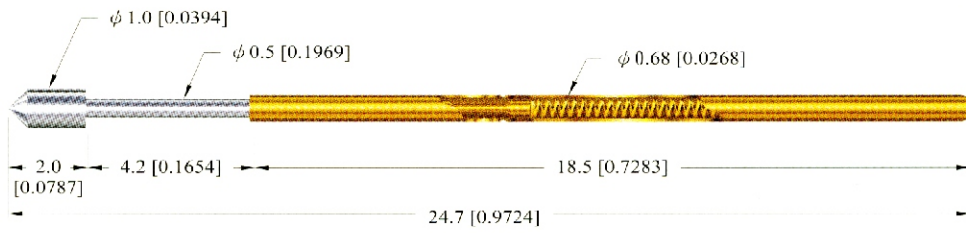


Plunger	Heat-Treated Beryllium Copper with Rhodium Plated Over Nickel
Barrel	Phosphor Bronze with Gold Plated
Spring	Music Wire with Gold Plated
Receptacle	Phosphor Bronze with Gold Plated


HP-02A1




HP-02B

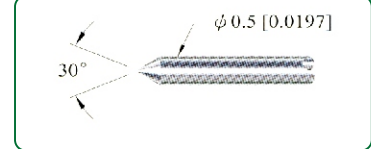


HP-02D




HP-02E1

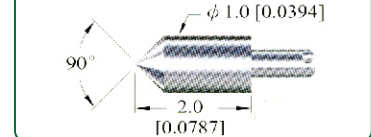


HP-02E2



HP-02-F

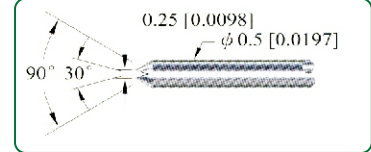

HP-02H



Min .Center 1.27mm [0.05]
Full Stroke 4.20mm [0.1654]

Full Stroke Spring Force (±20%) 150g [5.29oz]
2/3 Stroke Spring Force (±20%) 100g [3.53oz]

Current Rating 3A

Contact Resistance 30mΩ

Recommended Hole Size 0.95mm [0.0374]