







HP-62

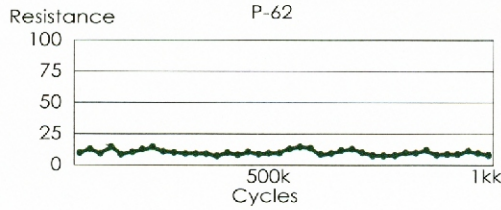


ACTUAL SIZE

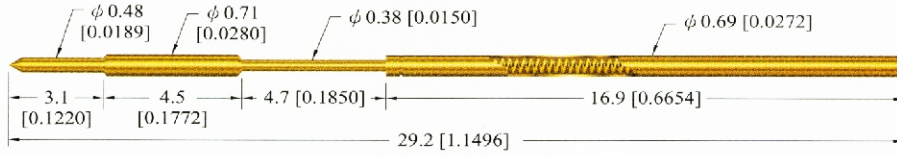

| | |
|------------|--|
| Plunger | Heat-Treated Beryllium Copper with Gold Plated Over Nickel |
| Barrel | Phosphor Bronze with Gold Plated |
| Spring | Music Wire with Gold Plated |
| Receptacle | Phosphor Bronze with Gold Plated |

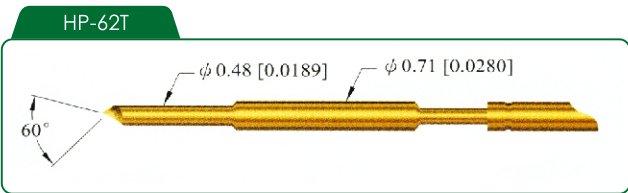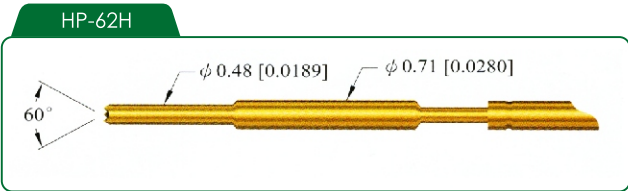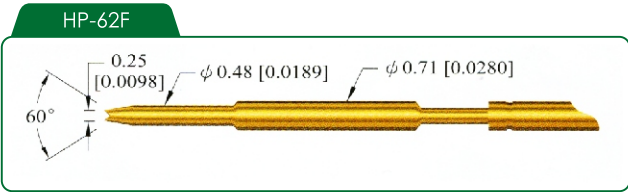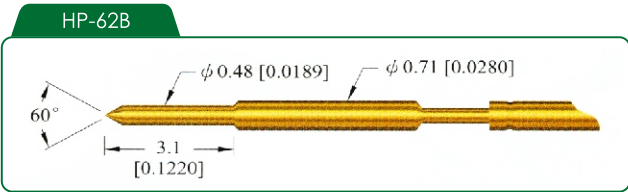

| | |
|--|-----------------|
| Min .Center | 1.27mm [0.05] |
| Full Stroke | 4.20mm [0.1654] |
| Full Stroke Spring Force (±20%) | 150g [5.29oz] |
| 2/3 Stroke Spring Force (±20%) | 100g [3.53oz] |

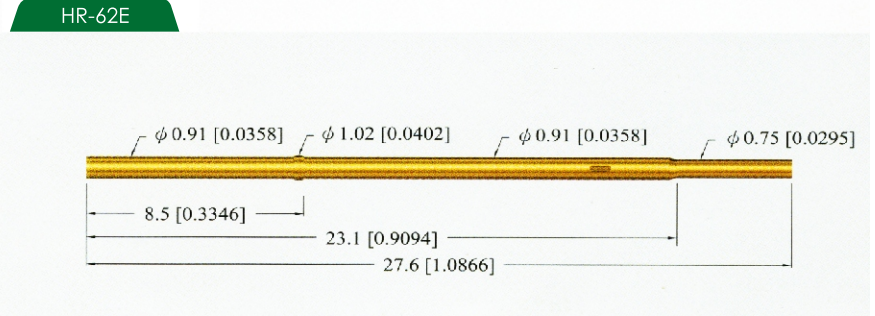

| | |
|------------------------------|-----------------|
| Current Rating | 3A |
| Contact Resistance | 30m Ω |
| Recommended Hole Size | 0.95mm [0.0374] |