


# HGP

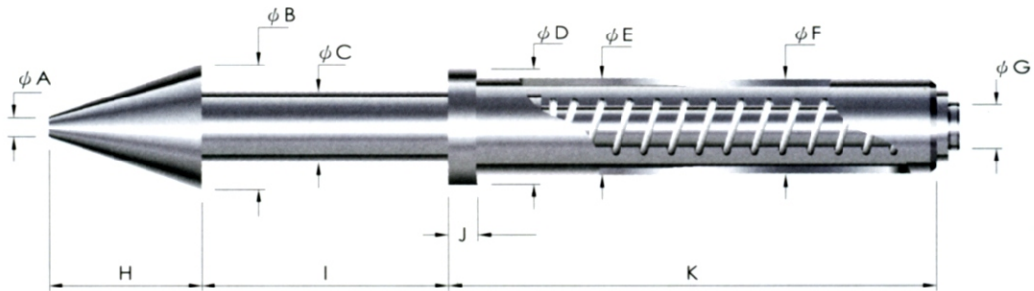

Recommended Hole Size	Full Stroke Spring Force (±20%)	2/3 Stroke Spring Force (±20%)	Suitable For
5.00mm [0.1969]	300g [10.58oz]	200g [7.05oz]	CCP-15M3-23L
5.00mm [0.1969]	350g [12.35oz]	290g [10.23oz]	CCP-10-16L CCP-101-16L P-25 / P-111

### Guide Pin (For Loaded Board)

Spec Type	$\phi A$	$\phi B$	$\phi C$	$\phi D$	$\phi E$	$\phi F$	$\phi G$	H	I	J	K	O.D.PCB [GH]
<i>I1-6.0</i>	1.00 [0.0394]	6.00 [0.2362]	3.67 [0.1445]	6.00 [0.2362]	5.00 [0.1969]	4.95 [0.1949]	2.48 [0.0976]	7.90 [0.3110]	20.60 [0.8110]	1.50 [0.0591]	35.00 [1.3780]	1.0/1.05mm [0.0394]/[0.0413]
<i>GP-2J</i>	1.00 [0.0394]	6.50 [0.2559]	3.68 [0.1449]	6.00 [0.2362]	5.00 [0.1969]	4.95 [0.1949]	2.53 [0.0996]	7.80 [0.3071]	13.80 [0.5433]	1.00 [0.0394]	25.00 [0.9843]	1.30/1.35mm [0.0512]/[0.531]

