


HCSP-6





ACTUAL SIZE

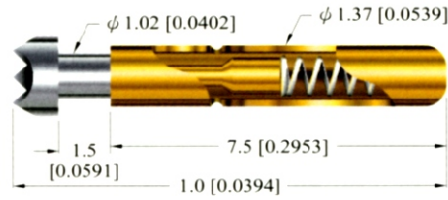


ACTUAL SIZE


Plunger	Beryllium Copper With Rhodium Plated
Barrel	Brass with Gold Plated
Spring	Stainless Steel
Receptacle	Brass with Gold Plated

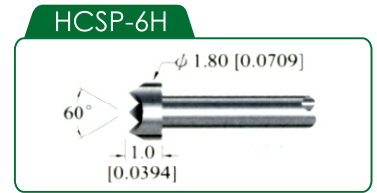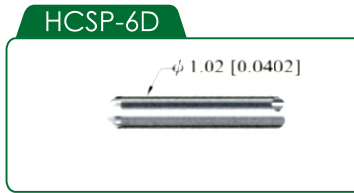


HCSR-6WC

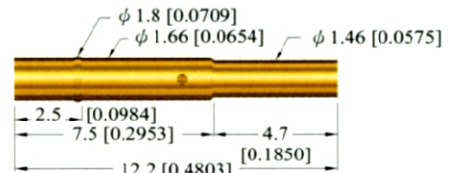


HCSR-6WS




HCSR-6W-2

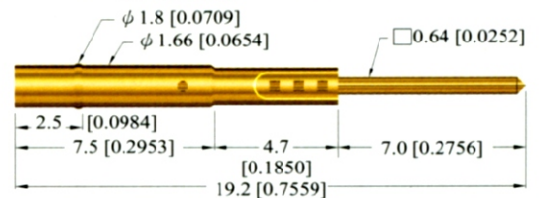


HCSR-6V

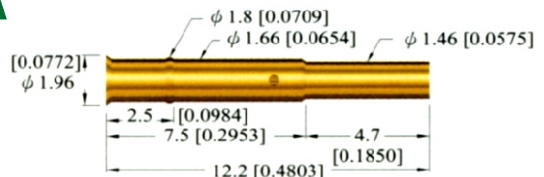

HCSR-6VS

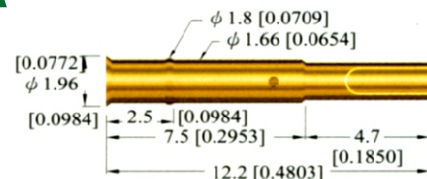

HCCSR-6V-2

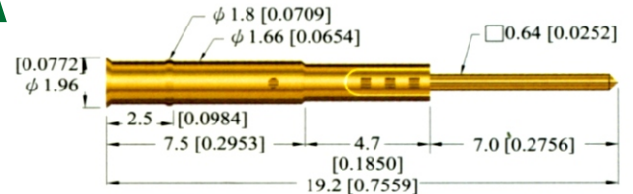

Min .Center	2.54mm [0.1000]
Full Stroke	1.50mm [0.0591]
Full Stroke Spring Force (±20%)	110g [3.88oz]
2/3 Stroke Spring Force (±20%)	80g [2.82oz]
Current Rating	3A
Contact Resistance	30mΩ
Recommended Hole Size	
Acrylic	φ 1.70mm [0.0669]
Bakelite	1.75mm [0.0689]
Fiber Reinforce Plastic	1.75mm [0.0689]