








HCSP-9




ACTUAL SIZE

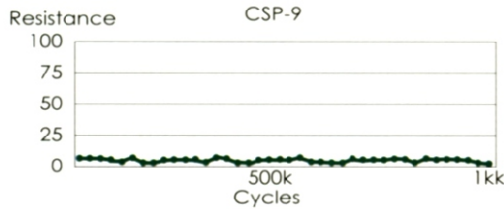


Plunger	Beryllium Copper With Rhodium Plated
Barrel	Brass with Gold Plated
Spring	Stainless Steel
Receptacle	Brass with Gold Plated

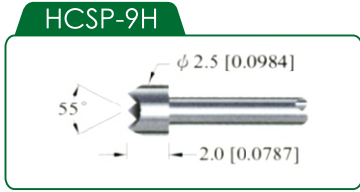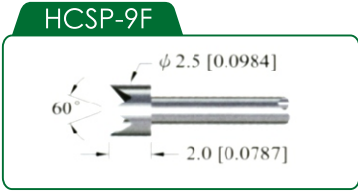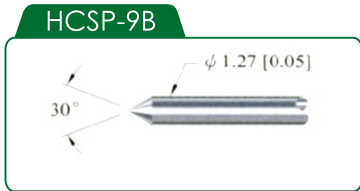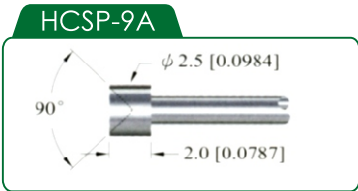


HCSR-9VC

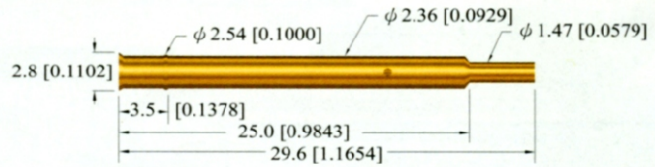


HCSR-9V-1

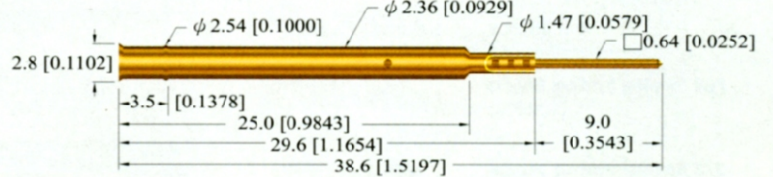

HCSR-9WC

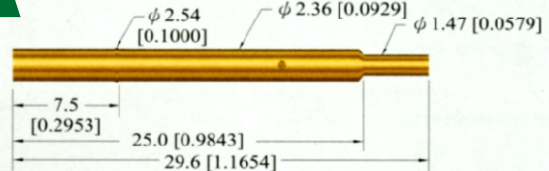

HCSR-9WC-1

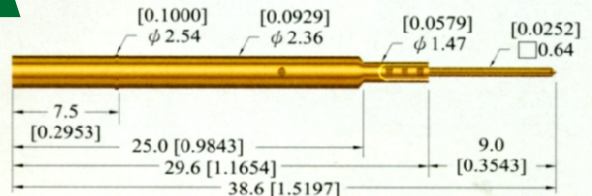

Min .Center	3.17mm [0.1248]
Full Stroke	6.35mm [0.2500]
Full Stroke Spring Force (±20%)	150g [5.30oz]
2/3 Stroke Spring Force (±20%)	100g [5.30oz]
Current Rating	5A
Contact Resistance	30mΩ
Recommended Hole Size	
Acrylic	φ 2.40mm [0.0945]
Bakelite	2.45mm [0.0965]
Fiber Reinforce Plastic	2.45mm [0.0965]