

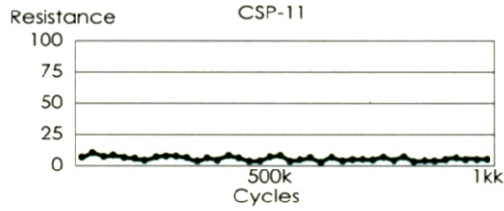






HCSP-11

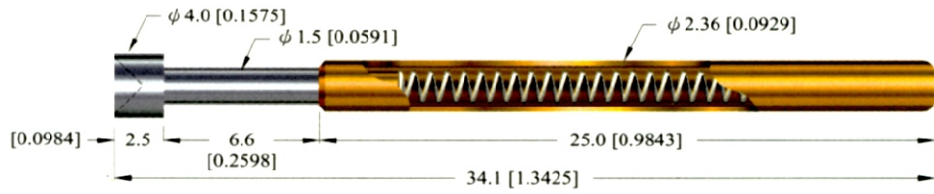

ACTUAL SIZE




Plunger	Heat-Treated Beryllium Copper With Rhodium Plated Over Hard Nickel
Barrel	Brass with Gold Plated
Spring	Stainless Steel
Receptacle	Brass with Gold Plated

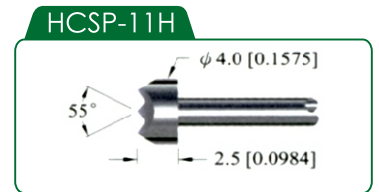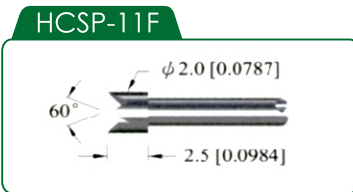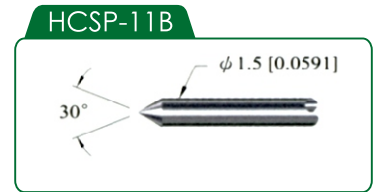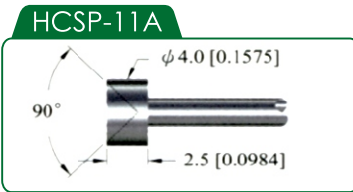

HCSR-11W1

Min .Center	3.97mm [0.1563]
Full Stroke	6.60mm [0.2598]
Full Stroke Spring Force ($\pm 20\%$)	150g [5.30oz]
2/3 Stroke Spring Force ($\pm 20\%$)	100g [5.30oz]
Current Rating	5A
Contact Resistance	30m Ω
Recommended Hole Size	2.7mm-2.75mm [0.1063]-[0.1083]

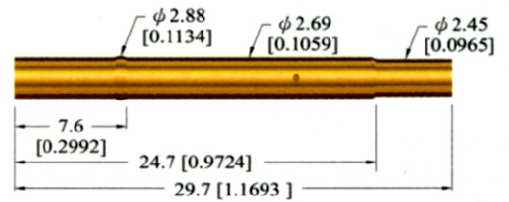

HCSR-11V1

